Watermakers	Village Marine	**322 - 323**
	US Watermaker	**324**
Refrigeration	Nova Kool	**326 - 330**
Stoves, Parts & Accessories	Stoves & Ranges	**331 - 335**
	Stove Pipe / Parts	**335 - 336**
BBQ's	Dickinson	**337**
	Magma Grills	**339 - 344**
Propane Fittings	Tanks & Tank Lockers	**345**
	Hose & Fittings	**346 - 347**
Heating	Dehumidifiers	**348 - 349**
	Heaters	**349 - 353**
	Heater Craft Heaters	**349 - 351**
	Seaward Water Heaters	**354**
	Torrid Water Heaters	**355**

Village Marine Tec.
Your Only Choice for Fresh Water from the Sea

Village Marine The Squirt & Stowaway Watermakers

A full featured unit with all of the benefits of larger de-salination systems at a fraction of the size, weight and cost. The Squirt will produce 200-800 U.S. gallons per day of pure drinking water from the sea. The unit is easy to install, is compact and full featured making it ideal for pleasure boats and light commercial applications.

- Magnetic drive low pressure pump provides over 10 feet boost pressure to the filtration system
- Maintenance-free air/oil separator lengthens the life of the membranes and pump
- 316 S/S, glycerine filled low pressure gauge for accurate reading of the high pressure pump
- Close coupled high pressure pump and motor eliminates belts and pulleys
- Easy to operate 316 S/S high pressure bypass valve controls the operating mode from cleaning/rinse to R.O.
- Adjustable 316 S/S pressure regulating valve for use in fresh, brackish or sea water
- Automatic diversion valve diverts water to discharge if water quality drops below acceptable standards
- Digital water quality monitor displays PPM TDS (parts per million total dissolved solids) of product water output
- Computer controlled diagnostics & electronics package with LCD message centre and digital PPM read-out
- Full one year limited warranty
- The Squirt is also available in a modular format
- Remote control included

The Squirt

Unit price does not include membranes or fresh water flush Please Order Separately

The Stowaway

The Squirt Watermaker

VIL SPW-400-110V*	400 US GPD
VIL SPW-400-220V*	400 US GPD
VIL SPW-600-110V*	600 US GPD
VIL SPW-600-220V*	600 US GPD

- 26" L x 16" W x 15" H

Village Marine The Stowaway Watermaker

The Stowaway is similar to the Squirt but separates its pre-filter and boost pump from the main unit to provide a smaller, more compact footprint.

VIL STW-400D-110V*	400 US GPD
VIL STW-400D-220V*	400 US GPD
VIL STW-600D-110V*	600 US GPD
VIL STW-600D-220V*	600 US GPD
VIL STW-800-220V*	800 US GPD

- 22" L x 14" W x 11" H

Pure Water Series Watermaker

The Pure Water series reverse osmosis desalinators are designed for continuous duty operation and are manufactured to truly industrial strength. Additional standard equipment: complete electronics package, heavy duty, low-rpm, 5-piston pumps, and oversized, dual stage, hi-flow pre-filtration improve reliability and reduce maintenance intervals in rugged conditions. Available in a self-contained framed, semi-modular and completely modular configurations with capacities ranging from 200 to 2,000 GPD.

- ***The Pure Water series shares all of the same features as listed for the Squirt series, with a belt driven hp pump***
- Full one year limited warranty

Pure Water Self-Contained

VIL PW-400-110V*	400 US GPD
VIL PW-400-220V*	400 US GPD
VIL PW-600-110V*	600 US GPD
VIL PW-600-220V*	600 US GPD
VIL PW-2000-220V*	2000 US GPD
VIL PW-2000-240V*	2000 US GPD
VIL PW-2000M-220V*	2000 US GPD

Unit price does not include membranes or fresh water flush Please Order Separately

Pure Water Self Contained

Pure Water Modular

VIL PW-1200M-220V*	1200 US GPD

Pure Water Semi-Modular

VIL PW-1200SM220V*	1200 US GPD

Pure Water Vertical

VIL PW-1200V-240V*	1200 US GPD

► NOTE: All watermakers are ordered as request items. Please call for additional information, availability and ordering.

Seaward Products

Gas Ranges & Stoves

- *100% safety shutoff devices*
- *Porcelain oven interiors*
- *Thermostatically controlled*

Electric Cook Tops

- *Ceran glass with grey graphics*
- *1,200 watt radiant elements*
- *Limiters prevent overheating*

Water Heaters

- *Electric/engine heat exchanger*
- *120/240 volt-1500 watt element*
- *Ignition protected*

Composite LPG Cylinders

- *30% lighter than steel*
- *Corrosion free*
- *Protective outer casing*

Manufacturing Quality Compact Appliances For Over 30 Years

www.seawardproducts.com

Village Marine Little Wonder Watermakers

These units come equipped with a unique titanium high-pressure pump head, fibreglass pressure vessel (s) and 316 stainless steel fittings. The Little Wonder is available in three styles: Modular, Semi-modular and Vertical frame. The framed unit is the most convenient to install: simply connect the hoses, run the power and you're in business. The modular system is ideal for sail boat applications by allowing the user the freedom to install components where space permits. The LW system includes pre-filter, cleaning system, cleaning chemicals, spare filter, boost pump, product water sample valve and manual freshwater flush..

Little Wonder Vertical

- Titanium pump impervious to the corrosive sea water environment and designed for maximum efficiency
- Adjustable 316 S/S pressure regulating valve provides constant pressure which no other unit in the market provides
- All 316 S/S high pressure piping for superior duty life
- 316 S/S glycerine filled high pressure gauge to assure accurate reading of pressure from high pressure pump
- Product flow meter to monitor gallons per hour of product water being produced
- The only 12 volt reverse osmosis unit that works in cold or tropical sea water and brackish lake water
- Full one year limited warranty

Little Wonder Modular

Little Wonder Semi-Modular

Unit price does not include membranes
Please Order Separately

Modular Units

VIL LWM-145-12V* 145 US GPD
VIL LWM-200-12V* 200 US GPD

- LWM modular unit: 45" L x 8" W x 10" H, 48 lbs

Framed Units (Semi-Modular)

VIL LW-145-12V* 145 US GPD
VIL LW-200-12V* 200 US GPD

- LW Framed unit: 26.5" L x 11" W x 9.25" H, 63 lbs

Vertical Units

VIL LWV-145-12V* 145 US GPD
VIL LWV-200-12V* 200 US GPD

- LW Framed unit: 13" L x 13" W x 25" H, 70 lbs

** All units are available in 24 volts

Village Marine Hand Held Digital Tester

Battery operated, pocket sized instrument used to measure PPM (parts per million) of TDS (total dissolved solids) in your product water and to evaluate your reverse osmosis membrane's performance. Reads up to 1000 PPM TDS. Use with PW, LW & Squirt units.

VIL 99-1990

► NOTE: Please call for more information on these products or have us quote you on models for land, fish camps, resorts & small communities.

Parts:

Part #	Description	Watermaker
VIL 20-2002	.125-Amp fuse	STW/SPW/PW
VIL 20-2022	2-Amp fuse	STW/SPW/PW
VIL 20-2042	4-Amp fuse	STW/SPW/PW
VIL 30-0405	"O-ring" for filter tank	PW
VIL 33-0005	5 mic. 30 S.F. filter cartridge	PW
VIL 33-0020	20 mic. 30 S.F. filter cartridge	PW
VIL 33-0052	5 mic 15 S.F. filter cartridge	
VIL 33-0053	20 mic 15 S.F. filter cartridge	
VIL 33-0117	5-MIC 10 S.F. Filter	STW/SPW/LW
VIL 33-0118	20-MIC 10 S.F. Filter	STW/SPW/LW
VIL 33-0311	Carbon Fresh H2O flush cartridge	SPW/STW/LW
VIL 33-0315	Charcoal Filter 15 S.F.	
VIL 33-1034	Filter housing	SPW/STW/LW
VIL 35-0034	Plankton screen & filter housing	LW/STW/SPW
VIL 35-0030	Plankton filter	LW/STW/SPW
VIL 85-0036	600 gram #1 cleaner	PW
VIL 85-0037	600 gram #2 de-scaler	PW
VIL 85-0038	600 gram #3 preservative	PW
VIL 85-0042	#1 Cleaner 5 lb	PW
VIL 85-0043	#2 Cleaner 5 lb	PW
VIL 85-0044	#3 Chemical 5 lb	PW
VIL 85-0102	Cleaning filter Kit (#1 & #2)	STW/LW/SPW
VIL 85-0103	Preservation filter Kit (2 filters)	STW/LW/SPW
VIL 85-0050	High pressure pump oil Qt.	LW/SPW/PW/STW
VIL 90-0215	Manual fresh water flush	LW/SPW/STW
VIL 90-0135	PH Strip test kit	all
VIL 90-1783	Auto-flush	SPW/MPW

*Kits includes: cleaning chemical kit, drive belt, 16 oz. of pump oil, seal kit, valve kit, two 5 micron filter cartridges.

US Watermaker

Clearwater Super Compact Series

The Clearwater Super Compact series is a frame mounted unit with manual start/stop and automatic freshwater flush. These are available in 400, 600, 800 1200 & 1500 GPD sizes.
Standard equipment includes:

- CAT PUMPS hp pump w/316SS pump head (pump head lifetime guarantee)
- Fibreglass pressure vessel (s) guaranteed for life
- Spiral wound membranes with three-year pro-rated warranty
- Complete digital electronic monitoring
- Remote control
- Automatic fresh water flush system
- Magnetic drive boost pump
- Pre-filtration

USW CW-400*	400 US GPD
USW CW-600*	600 US GPD
USW CW-800-2*	800 US GPD (2 x 40") + pressure vessels
USW CW-800-4*	800 US GPD (4 x 20") + pressure vessels
USW CW-1200*	1200 US GPD
USW CW-1500*	1500 US GPD

*Request Items

Available voltage: 115/230VAC

Frame size: 24” Wide x 14” Deep x 12” High

USWATERMAKER utilizes a 316SS pressure regulating valve, powder coated aluminum frames, all stainless steel fittings, and glycerin filled pressure gauges. The Clearwater Series offers flexibility in installation as well.

US Watermaker

Island Explorer Series

The Island Explorer is an economical modular unit available in 500 or 900 GPD sizes. Designed for hard to fit locations on powerboats and sailing vessels.
Standard equipment includes:

- CAT PUMPS hp pump w/316SS pump head (pump head lifetime guarantee)
- Fibreglass pressure vessel (s) guaranteed for life
- Spiral wound membranes with three-year prorated warranty
- Hand held digital tester
- Manual fresh water flush system
- Magnetic drive boost pump
- Pre-filtration

USW IE-500*	500 US GPD
USW IE-900*	900 US GPD

*Request Items

Available voltage: 115/230VAC

Specifications

Production capacity:	*400 to 1200 US gallons per day*
Raw water flow:	*3 gallons per minute*
Waste water flow:	*2.4 Gallons per minute*
Motor:	*Baldor 2 horsepower - 56C close coupled*
Kw (max):	*2.1 Kilowatts*
Amps (max):	*18.4 / 9.2*
Volts:	*115 / 230*
Phase:	*Single*
Service factor:	*1.15*
High pressure pump:	*General pump 316 stainless model WM*
High pressure control:	*Adjustable pressure regulator (1000 psi limit)*
Pressure vessels:	*Composite 3,000 psi burst*
Membranes:	*Koch SW2540 high flow*
Operating pressure:	*825 psi*
Prefilters:	*2.5 X 10; cartridge type - disposable*
Feed pump:	*1/4 horse power magnetic drive 110 / 240 volt*
Feed pressure:	*5 psi*
Raw water connection:	*3/4" hose barb*
Waste water connection:	*1/2" hose barb*
Product water connection:	*1/2" hose barb*

Parts:

USW 10211*	2.5" x 10", 5 micron filter
USW 10212*	2.5" x 10", 20 micron filter
USW 10725*	2.5" x 10", carbon filter
USW 10245*	2.5" x 10", plankton filter pleated
USW 10229*	Filter wrench - standard housing
USW 10230*	2.5" x 10" clear, filter housing

*Request Items

NOVA KOOL

Mobile Refrigeration for Marine • RV

NOVA KOOL *has manufactured quality marine refrigeration products for over 20 years.*

- *Refrigerators and freezers in single or two door, side by side and upright configurations*
- *Available in DC and AC/DC models*
- *Capacities from 1.3 to over 9 cubic feet*

www.novakool.com

NOVA KOOL

Top of the line, Canadian made refrigerators that are powered by 12V DC (12V DC/115V AC optional). They utilize a German built Danfoss compressor that is constructed with a traditional crankshaft, connecting rod, and piston driven by a brushless DC electric motor. The compressor automatically shuts down in low voltage conditions (below 10.5 volts) and kicks back in at 11.5 volts. If using an AC/DC unit, it automatically switches to AC, when AC power is available. The interior lining is made of impact resistant polystyrene plastic with solid fill urethane insulation. Designed for marine use, they can operate at a constant angle of up to 30 degrees. The quiet DC compressor will not interfere with other equipment, when operated solely on 12 volts.

Contact us for direct crossover information if you are replacing a fridge or freezer

Nova Kool Single Door Refrigerators

These units have a large interior volume with a small cut out dimension. Large reversible doors, with magnetic gaskets for a positive seal. All stainless steel hinges. Construction is rugged 18 gauge epoxy coated satin coat steel frame with a galvanized steel outer cabinet shell. Thermostat controlled for a wide range of settings. The removable door panel can be replaced to match differing interiors. Standard freezer compartments with doors and ice tray, except the R2600. Amp draw is 2.2 amp 12VDC.

Part #	Volts	Volume (cu.ft.)	Cut-Out (H x W x D)	Flange	Panel max.	Weight
NOV R1900DC **NOV R1900ACDC**	12/24 VDC 12/24 & 100/240 50/60 Hz	1.9	20-5/8" x 15-5/8" x 17-3/4"	21-3/8" x 16-3/8"	19-3/4" x 15-1/8"	40 lbs
NOV R-2300DC	12/24 VDC	2.1	28-3/8" x 16-3/4" x 14"	29-1/4" x 17-3/4"	27-7/8" x 16-9/16"	45 lbs
NOV R2600DC **NOV R2600ACDC**	12/24 VDC 12/24 & 100/240 50/60 Hz	2.4	20-1/4" x 18" x 19-1/2"	21" x 18-3/4"	20-3/16" x 17-5/16"	39 lbs
NOV R-3800DC **NOV R3800ACDC**	12/24 VDC 12/24 & 100/240 50/60 Hz	3.5	28-3/8" x 20-1/4" x 18"	29-1/4" x 21"	27-7/8" x 19-5/8"	54 lbs
NOV R4500DC **NOV R4500ACDC**	12/24 VDC 12/24 & 100/240 50/60 Hz	4.3	28-3/8" x 20-1/4" x 21"	29-1/4" x 21"	27-7/8" x 19-5/8"	59 lbs
NOV R5810DC **NOV R5810ACDC**	12/24 VDC 12/24 & 100/240 50/60 Hz	5.8	31-3/4" x 23-1/8" x 23-3/4"	33-1/8" x 24-1/2"	29-5/8" x 21-3/8"	69 lbs

R1900

R2300

R2600

R3800/R4500

R5810

Nova Kool Two Door Refrigerators

The two door unit refrigerators draw 4.3 amps on 12VDC when running with the exception of the RFU8220/9000 series which draw 5.5 amps when running. Key features are positive latch system, reversible door swing, stainless steel fasteners and hinge hardware, rugged steel cabinets and mounting flanges.

Part #	Volts	Interior/Freezer (cu.ft.)	Cut-Out (H x W x D)	Flange	Panel 1 Panel 2	Weight
Under Counter Refrigerators						
NOV RFS7501DC **NOV RFS7501ACDC**	* **	7.5 / 2.0	34" x 28" x 23"	35" x 29"	33-3/4" x 17-7/8" 33-3/4" x 9-5/16"	90 lbs
Upright Refrigerators						
NOV RFU6200DC	*	6 / 2.5	47-3/4" x 20-1/4" x 20-1/2"	48-3/4" x 21"	27-7/8" x 19-5/8" 17-5/16" x 20-3/16"	93 lbs
NOV RFU6800DC		6.8 / 2.5	47-3/4" x 20-1/4" x 21-1/2"	48-3/4" x 21"	28" x 19-5/8" 17-5/16" x 20-3/16"	95 lbs
NOV RFU8000DC **NOV RFU8000ACDC**	**	6.8 / 2.5	51-7/8" x 23-1/4" x 23-1/2"	53-13/16" x 24-1/2"	27-7/8" x 19-5/8" 17-1/4" x 19-5/8"	100 lbs
NOV RFU8220DC **NOV RFU8220ACDC**	* **	7.3 / 1.6	52-7/8" x 23-1/4" x 19-1/2"	53-1/4" x 24-3/4"	13-3/8" x 21-3/8" 29-5/8" x 21-3/8"	110 lbs
NOV RFU9000DC **NOV RFU9000ACDC**	* **	9.1 / 2.6	52-7/8" x 23-1/4" x 22-3/4"	53-1/4" x 24-3/4"	13-3/8" x 21-3/8" 29-5/8" x 21-3/8"	110 lbs

*12/24 VDC ** 12/24 & 100/240 50/60 Hz

RFS7501

RFU8000

RFU6200 / 6800

RFU8220/9000

Replacing an Older Fridge or Freezer:

If you are replacing an older fridge or freezer, please refer to the Crossover Chart on page 330

Nova Kool Top Load Refrigerator/Freezers

- Replaceable door panels for a custom finish to your interior
- Environmentally sound 134a refrigerant
- CFC free urethane foam in cabinet and doors
- Magnetic door gaskets for positive seal
- Stainless fasteners & hinges used throughout
- Maintenance friendly & efficient static condenser
- Low battery protection to help prevent full discharge of batteries
- Low amperage fan
- AC/DC: 12 & 24 VDC and 100-240 VAC 50/60HZ

Part #	Volts	Volume (cu.ft.)	Cut-Out (H x W x D)	Flange	Panel max.	Weight
NOV TL2500DC **NOV TL2500ACDC**	* **	2.5	20-1/4" x 18" x 27"	21" x 18-3/4"	20-3/16" x 17-5/16"	55 lbs

*12/24 VDC
** 12/24 & 100/240 50/60 Hz

Nova Kool Freezers

Single door freezers draw 4.3 amps on 12VDC when running. Key features are positive latch system, reversible door swing, stainless steel fasteners and hinge hardware, rugged steel cabinets and mounting flanges.

Part #	Volts	Volume (cu.ft.)	Cut-Out (H x W x D)	Flange	Panel max.	Weight
NOV F2600 DC	12/24 VDC	2.4	20-1/4" x 18" x 19-1/2"	21" x 18-3/4"	20-3/16" x 17-5/16"	43 lbs

Nova Kool Compressor Cooler / Freezers

- 12/24 VDC/ optional 110 VAC
- Hermetic domus compressor w/low voltage protection
- Temperature range: -18 to +10°C
- Removable carry handles
- Simple, secure lid lock
- Low voltage protection
- LED temperature display
- Low power consumption
- Auto reverse polarity protection
- Standard height for 2L bottles
- Quiet operation

Part #	Volume	H x D x W	Input	Weight
NOV BCD30	30 Litre	25.75" x 15.75" x 15"	35 W	40 lbs
NOV BCD45	45 Litre	25.75" x 15.75" x 17"	48 W	53 lbs
NOV BCD60	60 Litre	25.75" x 15.75" x 20.5"	55 W	55 lbs

Parts:

NOV BCD30CVR Insulated cover for BCD30
NOV BCD45CVR Insulated cover for BCD45
NOV BCD60CVR Insulated cover for BCD60
NOV ACDC/ADPT AC/DC adapter kit

U-Line Ice Maker

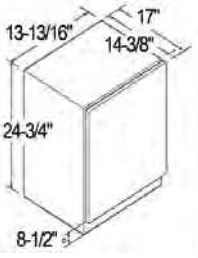

Conserves water and energy, making over 23 lbs. of ice cubes daily from less than 3 gallons of water and uses less electricity than an ordinary 75-watt light bulb. Requires no drain, only a water line connection. Can be installed free standing or built into your galley. Stores 12 lbs. of ice and has an adjustable temperature control. Door is field reversible, accepts custom door panels and comes with a locking pin.

ULI BI-95BTP 65 lbs, 110V

Lev-O-Gage Fridge Thermometer

Refrigerator/freezer thermometer mounts on inside wall of refrigerator or stands up on solid shelf. Easy to install with special adhesive tape. Tough acrylic case. 2" High.

LEV 505

Nova Kool Refrigeration Systems

The simple, reliable and efficient means to convert an icebox into a refrigerator or even a freezer. It's a system engineered of components designed specifically for marine application. Three parts make up the system, a compressor assembly, a freezer unit, and a thermostat. The 12 volt compressor draws a very low amperage. The average draw is only 1.5 to 2.5 amps per hour in an adequately insulated box. The freezer unit is exactly like the freezer compartment in your household fridge, except smaller. The unit cools the entire box as well as provides a freezer. Anywhere from a 1 - 8 cubic foot icebox can be accommodated, equipping it to be a refrigerator, a full freezer or a combination refrigerator/freezer.

LT201

Width ..... 2" - 18" spread width
Length..... 16"
Depth..... 11-3/8"

- Cooling capacity as freezer: 2-4cu.ft.
- Cooling capacity as fridge: 4-8cu.ft.
- Mounting: any position

NOV LT201-F	Three plates & compressor
NOV LT-201-F1	Single plate freezer unit
NOV LT201-FL	Single plate & compressor
NOV LT-201-F-FLEX	3 Plate freezer unit w/flexline
NOV LT-201-FL/FLEX	1 Plate freezer unit w/flexline

- Includes assembled three plates, compressor & Flex line

Width ..... 6-3/4"
Length..... 14-1/2"
Depth..... 12"

- Cooling Capacity: 4-8 cu. ft.
- Insulation required: 3-4 inches

NOV LT201-RT6	Freezer box & compressor
NOV LT-201-RT6-FLEX	Flex Line package

- Includes assembled freezer box, compressor & Flex line

Nova Kool Flex Line

- Flex line evaporators are designed to fit our Efficient LT201 and LT210 Cooling Units
- Designed to stay flexible during installation, even if you don't get it right the first try
- Can be coiled and uncoiled over 200 times
- Designed for mobile applications including; marine, RV and trucking
- Flex line has been used in mobile commercial refrigeration for over 10 years
- Uses reusable quick couplings
- Available on all Nova Kool evaporators and can be uncoiled from 2' to 12'

LT-201-RT6-FLEX

Flex Line systems come completely assembled,. charged and ready for installation

LT 201 Specifications

- *12-24 VDC*
- *Variable speed compressor*
- *Low battery protection*
- *Compressor runs on a 30° angle*
- *Over sized air cooled condenser for easy installation in all high ambient temperatures*

Nova Kool Miscellaneous Items

NOV PS-110VAC	Power supply 110V
NOV LATCH75	Molded plastic latch
NOV LIGHT24	24V light bulb
NOV PANEL 26B	Black panel 17.375" x 20"
NOV PANEL 38B	Black panel 19.75" x 28"
NOV PANEL 38W	White panel 19.75" x 28"
NOV THERMOSTAT	Thermostat plus
NOV THUMBLATCH L	S/S kit - left
NOV THUMBLATCH R	S/S kit - right
NOV FAN	12V fan
NOV ICE TRAY-LRG	Ice tray

Nova Kool Flange Kits

Flange kit for the R3800 and R4500 provides a way of converting these units to fit directly into the existing cabinets of an older cut out of 32-7/8" H x 22" W without expensive and time consuming modifications.

NOV FRAMEKIT-704

NOVA KOOL Size Crossover Chart

NORCOLD			NOVA KOOL						
MODEL#	VOL	H x W x D	MODEL#	VOL	H x W x D		MODEL#	VOL	H x W x D
DC0051	2.7	20 1/2 x 18 1/2 x 21	R2600	2.4	20 1/4 x 18 x 19 1/2				
DC230	1.7	20 x 15 x 18	R1900	1.9	20 1/2 x 15 5/8 x 17 3/4	OR	R1600	1.3	20 1/2 x 15 5/8 x13 3/4
DC254	1.9	20 1/4 x 17 3/4 x 20 3/8	R2600	2.4	20 1/4 x 18 x 19 1/2				
DC340	1.7	20 1/2 x 15 1/4 x 17 3/4	R1900	1.9	20 1/2 x 15 5/8 x 17 3/4	OR	R1600	1.3	20 1/2 x 15 5/8 x 13 3/4
DE0040	1.7	20 1/2 x 15 1/4 x 17 3/4	R1900	1.9	20 1/2 x 15 5/8 x 17 3/4	OR	R1600	1.3	20 1/2 x 15 5/8 x 13 3/4
DE0041	3.6	30 7/8 x 23 1/4 x 23 1/2	R5810	5.8	31 5/8 x 23 1/8 x 23 3/4	OR	R4500	4.3	28 3/8 x 20 1/4 x 21
DE0051	2.7	20 1/2 x 18 1/2 x 21	R2600	2.4	20 1/4 x 18 x 19 1/2				
DE0061	7	52 7/8 x 23 1/4 x 24 3/4	RFU9000	9.1	52 7/8 x 23 1/4 x 22 3/4	OR	RFU8220	7.3	52 7/8 x 23 1/4 x 19 1/2
DE251	1.9	20 1/4 x 17 3/4 x 20 3/8	R2600	2.4	20 1/4 x 18 x 19 1/2				
DE351	1.9	20 1/2 x 18 1/2 x 21	R2600	2.4	20 1/4 x 18 x 19 1/2				
DE390	2.8	30 7/8 x 20 1/2 x 20 1/8	R4500	4.3	28 3/8 x 20 1/4 x 21	OR	R3800	3.5	28 3/8 x 20 1/4 x 18
DE400	2.8	30 3/8 x 20 1/2 x 20 3/4	R4500	4.3	28 3/8 x 20 1/4 x 21	OR	R3800	3.5	28 3/8 x 20 1/4 x 18
DE440	1.6	20 1/2 x 15 1/4 x 17 3/4	R1900	1.9	20 1/2 x 15 5/8 x 17 3/4	OR	R1600	1.3	20 1/2 x 15 5/8 x 13 3/4
DE441	3.1	30 7/8 x 23 1/4 x 23 1/2	R5810	5.8	31 5/8 x 23 1/8 x 23 3/4	OR	R4500	4.3	28 3/8 x 20 1/4 x 21
DE451	1.9	20 1/2 x 18 1/2 x 21	R2600	2.4	20 1/4 x 18 x 19 1/2				
DE461	6.3	52 7/8 x 23 1/4 x 23 3/4	RFU9000	9.1	52 7/8 x 23 1/4 x 22 3/4	OR	RFU8220	7.3	52 7/8 x 23 1/4 x 19 1/2
DE490	2.8	30 7/8 x 20 1/2 x 20 1/8	R4500	4.3	28 3/8 x 20 1/4 x 21	OR	R3800	3.5	28 3/8 x 20 1/4 x 18
DE540	3.1	30 7/8 x 23 1/8 x 23 1/4	R5810	5.8	31 5/8 x 23 1/8 x 23 3/4	OR	R4500	4.3	28 3/8 x 20 1/4 x 21
DE541 or DE541	3.1	30 7/8 x 23 7/8 x 23 1/4 30 7/8 x 23 1/4 x 23 1/2	R5810	5.8	31 5/8 x 23 1/8 x 23 3/4	OR	R4500	4.3	28 3/8 x 20 1/4 x 21
DE560	6.3	52 1/2 x 23 1/8 x 23 1/4	RFU9000	9.1	52 7/8 x 23 1/4 x 22 3/4	OR	RFU8220	7.3	52 7/8 x 23 1/4 x 19 1/2
DE561	6.3	52 7/8 x 23 1/4 x 23 3/4	RFU9000	9.1	52 7/8 x 23 1/4 x 22 3/4	OR	RFU8220	7.3	52 7/8 x 23 1/4 x 19 1/2
DE704	3.2	32 7/8 x 22 x 21 7/8	R4500 & FRAME704	4.3	28 3/8 x 20 1/4 x 21	OR	R5810	5.8	31 5/8 x 23 1/8 x 23 3/4
DE728	6.2	51 7/8 x 23 15/16 x 23	RFU9000	9.1	52 7/8 x 23 1/4 x 22 3/4	OR	RFU8220 RFU8320	7.3 7.3	52 7/8 x 23 1/4 x 19 1/2 45 1/2 x 23 1/4 x 21 3/4
DE828	6.2	51 7/8 x 23 15/16 x 23	RFU9000	9.1	52 7/8 x 23 1/4 x 22 3/4	OR	RFU8220 RFU8320	7.3 7.3	52 7/8 x 23 1/4 x 19 1/2 45 1/2 x 23 1/4 x 21 3/4

RFU8220 and RFU9000 both have easily removed mounting flanges that reduce depth by 3/4" to get thru tight spots
RFU8220 is ideal for applications where clearance thru do0rways etc is limited to get unit into boat
RFU8000 is ideal for applications where cut out height cannot be increased to 52 7/8" from original 51 7/8 (DE828/728)
Frame704 when used in conjunction with R4500 or R3800 to replace the DE704

Seaward Portable Butane Stove

An extremely safe and well constructed portable stove. Constructed from stainless steel and fitted with a heavy duty regulator and burner. Automatic piezo ignition and handy carrying case are also included. Rated for indoor use this portable butane gas cooker comes with the following safety features:
1) Flame failure device- switches off gas after 6 seconds if the flame is extinguished.
2) Pressure sensitive safety device- ejects the gas cartridge at unsafe pressure levels
3) In line safety cut out- cuts gas flow if over pressurized.
4) Prevention of accidental ignition- two step ignition procedure

- Weight; 2.2kg.
- W: 13-1/2" x L: 11" x H: 3-1/2"

SWD BS100 Portable cooker

Parts:

SWD BU-6(BU5) 220 gram butane cartridge 4/pkg

Seaward Built-In Butane Stove

A great replacement for alcohol stoves. Compact design with a stainless steel lid over a black enamel base. 100% safety controls with high heat safety shut-off. Uses replaceable butane gas cartridges.

- Overall size: 17-1/2" W x 12-1/2" D x 4-1/2" H
- Cut-out: 16-3/4" W x 11-3/4" D x 4-1/2" H

SWD 1203-1006

Dickinson 2-Burner Drop-In Propane Stove

Heavy duty stainless steel construction with a 11,000 and 7,000 BTU burners. Comes with CGA/AGA Safety gas valve and safe push and turn electronic ignition. This unit is easily installed with under counter brackets and is a shallow 4.75 inches in height. Unit comes with pot holders, cutting board and will fit standard cut outs.

- H: 4.75" x D: 12.5" x W: 21.5"

DIC 00-2BP

Forespar Marine Hot Spot Mini Galley

A fully gimbaled marine stove which includes a low profile mounting bracket which allows the entire stove to be easily detached and stowed when not in use. It features an all stainless steel gimbaled "basket" with springs that secure the cooking pot. The burner can be turned off and on instantly with no preheating or priming necessary. A disposable propane cartridge gives up to 8 hours of hot, clean heat. A simple valve permits any flame intensity. Designed to accept U.S. department of transportation approved self-sealing propane bottles.

- 5000 BTU
- Dia: 8", H: 7" (without fuel canister)
- Weight: 1.5 lbs

FRS 150000

Parts:

FRS 150007 Mounting bracket only

Kit Includes:

- *2 Way gimbaled S/S burner with basket*
- *Aluminum all purpose cooking/coffee pot*
- *Plastic base*
- *Mounting brackets*

Seaward Drop-In Propane Stoves

Low profile counter top single and two burner stoves from Seaward. Designed for maximum cook top area in minimal galley space. 100% safety controls - automatic shut-off thermal couple valves shut off fuel in case flame blows out. Burners controlled by infinite adjustable valves. Automatic ignition. Porcelain enamel burner grates and caps and black tempered glass tops.

Part #	Burners	Overall W x D x H	Cut-Out W x D x H
SWD 1273-1000	1 x 7,000 BTU	10" x 12" x 2-3/4"	9" x 11-1/8 x 2-3/4"
SWD 2276-1000	2 x 7,000 BTU	21" x 12" x 2-7/8"	20-3/8" x 11-3/8" x 2-7/8"
SWD 3276-1000	3 x 7,000 BTU	21-1/2" x 18-5/8" x 3"	20-1/4" x 17-1/2" x 3"
SWD G3278-1001	2 x 7,000 BTU 1 x 10,000 BTU	21-1/2" x 18-5/8" x 3"	20-1/4" x 17-1/2" x 3"

Seaward Drop-In Propane Stove

- Stainless steel construction
- Thermocouple protected burners with piezo ignition
- Safety clips stop rattles even in the roughest sea conditions
- Sea rail is standard

Part #	Burners	Overall W x D x H	Cut-Out W x D x H
SWD 2272-1001	2 x 5,200 BTU	22-3/8" x 14-5/8" x 6-1/4"	22-7/16" x 13-3/4" x 6-3/8"

Accessories:

SWD 8330 Wooden cutting board

Seaward Propane Ranges

The Princess models are constructed with a combination of stainless steel or ceramic tops and doors. These stoves feature thermocouple protected burners, piezo ignition and a thermostatically controlled full size oven. The oven is double coated with porcelain enamel and has an adjustable oven rack. The one piece stove top grate (except the 3375-1002) and sealed burners make cleaning easy. Standard sea rail included.

Part #	Burners	Range	Top - Door	Holders	Overall W x D x H	Cut-Out W x D x H
SWD 2174-2001	2	Gimbaled	Stainless	0	21-3/8" x 17" x 22-1/16"	21-1/2" x 22-1/16 x N/A
SWD 2374-2002	2	Built-in	Stainless	1	21-3/4" x 15-1/4" x 22-1/16"	20-7/16" x 14-11/16" x 21-3/8"
SWD 3174-1000	3	Gimbaled	Black glass	1	21-3/8" x 21" x 22-1/16"	21-1/2" x 22-1/16" x N/A
SWD 3174-1002	3	Gimbaled	S/S - Black glass	1	21-3/8" x 21" x 22-1/16"	21-1/2" x 22-1/16" x N/A
SWD 3375-1002	3	Built-in	S/S - Black glass	0	21-3/4" x 19-7/16" x 22-1/16"	20-7/16" x 18-7/8" x 21-3/8"
SWD 3374-1000	3	Built-in	Black glass	1	21-3/4" x 19-7/16" x 22-1/16"	20-7/16" x 18-7/8" x 21-3/8"
SWD 3374-1002	3	Built-in	S/S - Black glass	1	21-3/4" x 19-7/16" x 22-1/16"	20-7/16" x 18-7/8" x 21-3/8"

Seaward Electric Range

All new styling and all stainless steel construction. Built for marine use, UL marine approved. Extra large oven/broiler with gleaming black door. Oven interior is concealed until light is turned on. Two high and one low speed surface burners. Infinite controls permit selection of exact cooking temperatures. Standard sea rail. Lift-up stainless steel lid provides extra shelf space and back splash protection. Attractive butcher block cutting board. Automatic safety switch cuts off current to burners when lid is in down position while oven will continue to operate. Weight: approximately 90 lbs. Wired for 120 volt service. Maximum operating load is 3.0 kW. Selector switch prevents over loading of 20 amp circuit.

- Overall: 19-7/16" D x 22-1/16" H x 21-3/4" W
- Cutout: 18-7/8" D x 21-3/8" H x 20-7/16" W

SWD 3342-1112

Seaward Electric Cook Tops

- Bevelled edge
- Princess three burner Ceran glass top electric stove
- Drop-in, frameless, flush mount Ceran glass with black graphics
- 120V, three 1,200 watt radiant elements
- Limiters in burners prevent overheating
- UL 858 or CE Certified

Dimensions

- Overall: 22" W x 20" D x 2-7/8" H
- Cutout: 21-3/8" W x 19-3/8" D x 2-7/8" H

SWD 3247-5100

Seaward Two Burner Electric Stove



Drop-in, flush mount Ceran glass. Two 1000 W radiant elements at 120 V. Limiters in burners to prevent overheating. UL 858 or CE Certified.

- Overall size: 22W x 13D x 2-7/8"
- Cut-out: 21-3/8 x 12-3/8D x 2-7/8"

SWD 2247-5100

Seaward Electric Gourmet Cook Top

High tech electric stove top is a drop-in, flush mount unit with a Ceran glass top and graphics. Elements are 1,200 watts each and have built in limiters to prevent overheating. 120V.

- Overall: 22" W x 13" D x 2-7/8" H
- Cutout: 21-3/8" W x 12-3/8" D x 2-7/8" H

SWD G2247-5100

Seaward Accessories

Rail Kits

Sea rail kits for drop in stoves, single or two burner configuration available. Complete kit includes stainless rail, pot holders and mounting hardware.

SWD 93223 2 burner kit
SWD 93224 1 burner kit

Burner Grates

Replacement grates for non euro stoves.

SWD 70114

Cutting Boards

SWD 72146 For 24 series
SWD 8330 For 2272-1001

dickinson

Dickinson stoves and heaters are manufactured with care by experienced staff to a high standard of workmanship. Rugged stainless steel construction, that's built to last. There are a variety of diesel and solid fuel models to satisfy all of your cooking and heating requirements.

Dickinson Beaufort

This stove is installed in many larger classic yachts and work boats. Features a cast-iron cooking surface of 24" x 36". Dry heating, hot water capability, large oven and a built-in utensil storage compartment make this stove ideal for year round cruising.

Oven Size	Overall
W: 20" x D: 20" x H: 14"	W: 36" x D: 28.5" x H: 35.5"
Flue Size	5"
Material	Stainless steel/cast-iron cooking top
Fuel	Diesel #2, #1 or Kerosene
Heat Output	Low 7750 BTU, High 32000 BTU
Burner	7" stainless steel 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Hot Water Coil	Optional (1 or 2 turn)
Weight	360 lbs / 163.44 kg

DIC 00-BEA* Diesel oil stove with 12 volt fan
DIC 00-BEA1* 12 volt fan & one turn hot water coil
DIC 00-BEA4* 32 volt fan & one turn hot water coil

*Request items

► *Also See: Diesel Heaters pg 352*

Dickinson Atlantic

This large model is equipped with a bigger natural draft diesel burner. Its cooking capacity can serve a crew of 6-8 and for boats 45-60ft.

Oven Size	Overall
W: 16" x D: 12-1/2" x H: 12"	W: 30.5" x D: 23" x H: 28.75"
Flue Size	5" / 12.7 cm
Material	S/S cast-iron cooking top
Fuel	Diesel, Stove Oil or Kerosene
Heat Output	BTU Low 8125 / High 24375
Burner	7" 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Hot Water Coil	Optional (1 or 2 turn)
Weight	182 lbs

DIC 00-ATL* Diesel oil stove with 12 volt fan
DIC 00-ATL-32V* Stove with 32 volt fan
DIC 00-ATL-1* (one turn) hot water coil
DIC 00-ATL-2* (two turn) hot water coil
DIC 00-ATL-1-32V* (one turn) hot water coil
DIC 00-ATL-2-32V* (two turn) hot water coil

*Request items

Dickinson Bristol

Smallest model for boats up to 36ft. Features a small oven able to accommodate a 9" x 9" baking dish. Ideal for smaller vessels and designed primarily for a fore and aft mount (facing port/ starboard).

Oven Size	Overall
W: 9" x D: 11-1/2" x H: 8-1/2"	W: 21" x D: 18.25" x H: 19.25"
Flue Size	4" / 10.16 cm
Material	Stainless steel/cast-iron cooking top
Fuel	Diesel (stove oil / kerosene optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" / 15.2 cm 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Hot Water Coil	Optional (1 turn)
Weight	82 lbs

DIC 00-BRI* Diesel oil stove with 12 Volt fan
DIC 00-BRI-1* Stove with (one turn) hot water coil

*Request items

Dickinson Bering

Utility model for boats 36ft-40ft. Manufactured with a single stainless steel wall. This model has the chimney outlet exiting from the right side of the cast-iron top. Cooking surface and oven size is similar to the Pacific though the stove is longer and narrower.

Oven Size	Overall
W: 10-1/2" x D: 13" x H: 10-1/2"	W: 24" x D: 16.5" x H: 20.5"
Flue Size	5"
Material	Stainless steel cast-iron cooking top
Fuel	Diesel (Stove oil or kerosene optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" / 15.2 cm 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Hot Water Coil	Optional (1 or 2 turn)
Weight	89 lbs

DIC 00-BER* Diesel oil stove with 12V fan
DIC 00-BER-1* Stove with (one turn) hot water coil

*Request items

Dickinson Pacific

Most popular model for boats 36ft-42ft. Features a double, insulated stainless steel outer surface, and an attractive appearance that will enhance the interior of any vessel. Its 22" maximum top width makes it the most suitable size for most galley range cutouts.

Oven Size	Overall
W: 10-1/2" x D: 13" x H: 10-1/2	W: 21.75" x D: 21.5" x H: 23.5"
Flue Size	5" / 12.7 cm
Material	Stainless steel/cast-iron cooking top
Fuel	Diesel (stove oil or kerosene optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" / 15.2 cm 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Hot Water Coil	Optional (1 or 2 turn)
Weight	110 lbs

DIC 00-PAC Diesel oil stove with 12V fan
DIC 00-PAC-1* Stove with (one turn) hot water coil
DIC 00-PAC-2* Stove with (two turn) hot water coil
DIC 00-PAC-32V* Stove with 32 Volt fan

*Request items

Dickinson Adriatic

For medium & larger vessels. Similar in appearance to the Pacific for boats 40ft-50ft. Provides a larger cooking surface and a wider oven that is more accommodating.

Oven Size	Overall
W: 15" x D: 13" x H: 10-1/2"	W: 26.25" x D: 21.5" x H: 23.5"
Flue Size	5" / 12.7 cm
Material	Stainless steel cast-iron cooking top
Fuel	Diesel (Stove oil or kerosene optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" / 15.2 cm 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Hot Water Coil	Optional (1 or 2 turn)
Weight	130 lbs

DIC 00-ADR* Diesel oil stove with 12V fan
DIC 00-ADR-1* Stove with (one turn) hot water coil
DIC 00-ADR-2* Stove with (two turn) hot water coil

*Request items

Dickinson Fuel Filter

Fuel filter and water trap. Comes with manual shut off. Ports are 1/4" female NPT.

- Length Overall: 5-1/4" Width: 2-1/2"
- **Not for use with gas**

DIC 20-010

Dickinson Accessories and Parts

DIC 01-030 12V fan motor blade & bracket
DIC 01-031 12V motor blade & bracket for Newport & Alaska
DIC 01-072 12V speed control & switch S/S housing
DIC 01-081 24V speed control & switch S/S housing
DIC 01-091 32V speed control & switch S/S housing
DIC 02-000 #3 D/0 metering valve
DIC 02-004 #3 S/0 metering valve
DIC 02-200 Metering valve repair kit
DIC 03-040 6" S/S burner ring
DIC 03-060 6" tall superheater
DIC 04-050 7" S/S burner ring
DIC 04-060 7" cast iron leg ring
DIC 04-070 7" cast iron split ring
DIC 05-020 Isoline cement, 5lb box
DIC 05-050 Mica window
DIC 07-000 6-3/4" x 10" cast iron lid
DIC 08-000 5" aluminum flue collar
DIC 08-010 Old style 5" aluminum flue collar
DIC 08-030 3" aluminum flue collar
DIC 11-000 S/S pot holders
DIC 14-000 Lid lifter

Dickinson Stove Pipe and Elbow

Stainless steel construction. Designed especially for Dickinson stoves and heaters.

DIC 16-000 3" x 22" stove pipe
DIC 16-040 3" x 45° elbow
DIC 18-040 5" x 45° elbow

Galvanized Stove Pipe Elbows

Galvanized steel elbows are fully adjustable and may be rotated to form either 45° or 90° connections. Available in a full range of sizes.

STO 243A 3"
STO 244A 4"
STO 45GE 4-1/2"
STO 245A 5"
STO 246A 6"

Stainless Stove Pipe Elbows

Heavy gauge all stainless steel elbows are fully adjustable and may be rotated to form either 45° or 90° connections. Available in a full range of sizes.

SSP 30 E 3"
SSP 40 E 4"
SSP 45 E 4-1/2"
SSP 50 E 5"
SSP 55 E 5-1/2"
SSP 60 E 6"

Galvanized Cloverleaf Caps

Galvanized steel stove pipe caps in a full range of sizes.

STO 153 3"
STO 154B 4-1/2"

Stainless Cloverleaf Caps

All stainless steel stove pipe caps in a full range of sizes.

SSP 30 C 3"
SSP 35 C 3-1/2"
SSP 40 C 4"
SSP 45 C 4-1/2"
SSP 50 C 5"
SSP 55 C 5-1/2"
SSP 60 C 6"

Galvanized Stove Pipe

Top quality stove pipe of galvanized steel. Available in two lengths, 15" and 30" and a full range of diameter sizes.

Part #	Diameter	Length
STO 363	3"	15"
STO 364A	4"	15"
STO 364B	4-1/2"	15"
STO 365A	5"	15"
STO 365B	5-1/2"	15"
STO 366	6"	15"
STO 354A	4"	30"
STO 355A	5"	30"
STO 355B	5-1/2"	30"
STO 356	6"	30"

Stainless Steel Stove Pipe

Heavy gauge all stainless steel stove pipe. Available in two lengths. 15" and 30" and a full range of diameter sizes. 304 SS.

Part #	Diameter	Length
SSP 3015	3"	15"
SSP 3515	3-1/2"	15"
SSP 4015	4"	15"
SSP 4515	4-1/2"	15"
SSP 5015	5"	15"
SSP 5515	5-1/2"	15"
SSP 6015	6"	15"
SSP 3030	3"	30"
SSP 3530	3-1/2"	30"
SSP 4030	4"	30"
SSP 4530	4-1/2"	30"
SSP 5030	5"	30"
SSP 5530	5-1/2"	30"
SSP 6030	6"	30"

Galvanized Tapered Stove Pipe

Top quality stove pipe taper of galvanized steel for adapting 4" pipe to 5".

STO 392

Stainless Tapered Steel Stove Pipe

Stainless steel stove pipe tapers for adapting
- 4-1/2" pipe to 5" and 5" pipe to 5-1/2"
- 9" lengths

SSP 5"-4-1/2"
SSP 5-1/2"-5"

Dickinson
Dress Rings, Flue Caps and Accessories

Handsome electro-polished stainless steel flue caps with excellent weather proofing and draft characteristics.

Part #	Size	Style
DIC 16-090	3"	H-Cap
DIC 17-090	4"	H-Cap
DIC 18-090	5"	H-Cap
DIC 16-080	3"	DP flue cap
DIC 17-080	4"	DP flue cap
DIC 18-080	5"	DP flue cap
DIC 16-070	3"	Dress ring
DIC 17-070	4"	Dress ring

Dickinson Barometric Flue Dampers

Stainless steel construction. Required to stabilize inconsistent draft conditions.

DIC 16-010 3" pipe, 7" long
DIC 17-010 4" pipe, 7" long
DIC 18-010 5" pipe, 9" long

Dickinson Flue Guards

Attractive brushed stainless steel guard provides protection from hot stove pipes. Comes complete with mounting clamps.
- 22" long

DIC 16-030 For 3" stove pipe
DIC 18-030 For 5" stove pipe

Dickinson Deck Fittings

Stainless steel deck fitting kits come complete with the deck fitting, dress ring, heavy rubber gasket and fasteners.

DIC 16-050 3"
DIC 17-050 4"
DIC 18-050 5"

Dickinson Spitfire 180 Marine Grill

- 20 gauge stainless steel
- Mirror polished top with a grain finished bottom
- Front and side cool touch handles
- Electronic ignition
- Thermometer
- Top rack for grilling perfection
- 1/4” rod grills
- Removable drip tray
- Will not blow out in the wind
- Includes black canvas cover
- Three year warranty on burners
- 180 square inches of cooking surface
- 11,000 BTU of wind proof grilling
- Weight: 30 lbs
- 24” W (Overall) x 13” H x 15” D

Includes table mount legs

DIC 00-SPT-180

Dickinson Sea-B-Que Grills

Superb S/S propane marine barbecue/oven. Many standard features including nonstick, no-flare cooking surface, removable drip tray and deck legs. Roll away hood.

Large

- 11,000 BTU
- Cooking surface: 20” x 11” (227 sq. in.)
- Overall: W: 28" x D: 12" x H: 14"
- Weight: 26 lbs

DIC 00-SBQL

Small

- 10,000 BTU
- Cooking surface: 16” x 9-1/4” (148 sq. in.)
- Overall: W: 24” x D: 10” x H: 12”
- Weight: 18 lbs

DIC 00-SBQS

Dickinson Round Sea-B-Que

One of the largest and most robust round stainless boat barbecues on the market. 7,000 BTU and excellent fuel efficiency. Deck legs included.

- 18 gauge, 304 stainless steel construction
- 162 square inch cooking surface
- 14-3/8” dia. cooking surface
- Electric ignition
- Removable nonstick porcelain grill sections
- Weight: 21 lbs
- 18” W x 16” D x 14-1/4” H

DIC 00-SBQ-R

Dickinson Optional Mounting Accessories

Universal Rail Mount

- Made for use with any Dickinson BBQ
- Mounts on square or round rails, 7/8" to 1-1/4"
- Mounts horizontal or vertical
- Quick release snap latch for easy removal

DIC 15-150A

'Scotty ' Post & Socket Mount

- Made for use with any Dickinson BBQ
- Attaches to a 'Scotty' type rod holder
- Quick release snap latch for easy removal
- Universal knuckle allows positioning at any angle

DIC 15-150P

Fishing Rod Holder Mount

- Made for use with any Dickinson BBQ
- Attaches to most types of rod holders
- Quick release snap latch for easy removal
- Knuckle allows positioning at any angle

DIC 15-150F

Taff Rail Mount With Sockets

- Stand off mount for cap or taff rails
- Stainless steel tubes and sockets
- Rails slide out and fold for storage

DIC 15-187

Dickinson Accessories

DIC 15-080	Drip tray for small/large SEA-B-QUE
DIC 15-103	Ignitor assembly for round BBQ
DIC 15-120	Universal BBQ thermometer
DIC 15-170	Round Sea-B-QUE Cover
DIC 15-173	Sea-B-QUE Mount sockets
DIC 15-184	Large SEA-B-QUE cover
DIC 15-185	Small SEA-B-QUE cover
DIC 15-180	Small food/drink tray with utensil hooks
DIC 15-181	Large food/drink tray with utensil hooks
DIC 15-182PS	*Small porcelain grill section
DIC 15-182SS	*Small S/S grill section
DIC 15-183PS	*Large porcelain grill section
DIC 15-183SS	*Large S/S grill section
DIC 15-061	Replacement burner – small
DIC 15-060	Replacement burner – large
DIC 15-101	Igniter assembly for large & small Sea-b-que
DIC 15-110	Regulator w/knob
DIC 15-200	Aussie grill, S/S for SBQS
DIC 15-201	Aussie grill, S/S for SBQL
DIC 15-202	Aussie grill, S/S for SBQR
DIC 15-203	Aussie grill, S/S for SPT 180-G

*Small & large BBQ's require 4 sections for a complete grill

MAGMA

Grills, Cookware & Accessories

Marine Kettle-2®

The World's Most Popular Marine Grills

Combination Stove & Gas Grill

Gourmet Series Grills

Grills Designed, Built, And Tested By Boaters For Boaters

"Cookware"

Magma offers the most advanced and versatile mounting hardware & accessories anywhere!

www.magmaproducts.com

Magma - Gourmet Series Grills Features

1 Full size inner safety shell
2 Reliable piezo crystal ignition
3 100% 18-9 mirror polished stainless steel
4 Convenient snap-out dual radiant plate
5 Large cooking grill
6 Large upper grill
7 Easy to read all S/S hermetically sealed thermometer
8 Oversized perfectly balanced lockable lid
9 Full-length handle
10 Front access, lock-in place grease tray
11 Swivelling valve regulator
12 Fold-Away legs

Magma Monterey

Shown with optional mount & serving shelf (sold separately)

- Fold-away legs
- 12” x 24” cooking grill
- Large upper grill, for slow grilling or for warming food such as vegetables or bread
- Easy to read all stainless steel hermetically sealed thermometer, with 750-degree safety glass
- Grilling area: 420 sq. in.
  Primary: 12” x 24”
  Secondary: 5-1/2” x 24”

MGP A10-1225L

Parts:

MGP 10-265	Regulator, high output
MGP A10-224	Control valve, high output
MGP 10-1057	Burner
MGP 10-1254	Grill grate
MGP 10-960	Piezo ignitor

Magma Newport

Shown with optional mount & serving shelf (sold separately)

- Fold-away legs
- 9” x 18” cooking grill
- Grilling area: 162 sq. in.

MGP A10-918L

Parts:

MGP 10-263	Regulator, low output
MGP A10-220	Control valve, low output
MGP 10-954	Grill grate
MGP 10-957	Burner
MGP 10-960	Piezo ignitor

Magma Catalina

Shown with optional mount & serving shelf (sold separately)

- Fold-away legs
- 12" x 18" cooking grill
- Large upper grill, for slow grilling or for warming food such as vegetables or bread
- Easy to read all stainless steel hermetically sealed thermometer, with 750-degree safety glass
- Grilling area: 315 sq. in.
  Primary: 12” x 18”
  Secondary: 5-1/2” x 18”

MGP A10-1218L

Parts:

MGP 10-264	Regulator, medium output
MGP A10-223	Control valve, medium output
MGP 10-1254	Grill grate
MGP 10-957	Burner
MGP 10-960	Piezo ignitor

Magma LPG Control Valves

For preregulated, low pressure, on-board LPG (propane) and CNG (natural gas) systems. These stainless steel and brass control valves are designed to connect to the low pressure side of the regulator. Hose and fittings not included.

Magma offers the largest selection of mounting options and accessories to customize your grill to your boat.

Connoisseur Series Grills

- *Fold-Away legs*
- *Inner Safety Shell*
- *100% 18-9 mirror polished stainless steel*
- *Convenient Snap-out radiant plate*
- *Oversized perfectly balanced lockable lid*
- *Full-length handle*
- *Front access, lock-in-place grease tray*
- *Swivelling valve/ regulator*

Magma Chefsmate

Wind tested for perfect even heat distribution, this grill offers the cooking performance usually only found in large back yard grills.

- Fold-away legs: perfect for that quick picnic on shore
- Front access, lock-in-place grease tray
- Grilling area: 162 sq. in. , Primary: 9" x 18"

* The fold-away legs are not recommended for use onboard. Optional mounting hardware is available for mounting for on-board use

MGP A10-803

Parts:

MGP 10-263	Control valve / Regulator, low output
MGP 10-957	Burner

Magma TrailMate

Small compact and powerful.

- Fold-away legs. perfect for that quick picnic on shore
- Grilling area: 108 sq. in.
- Primary: 9" x 12"

MGP A10-801

Parts:

MGP 10-262	Regulator, extra low output
MGP A10-219	Control valve, extra low output
MGP 10-927	Burner
MGP 10-924	Grease catch pan

Marine Kettle 2
Combination Stove & Gas Grills

- *Burner & hi-tech radiant plate & dome heat distribution design*
- *Swivelling, windproof turbo venturi & control valve design*
- *Hinged lid*
- *Reliable Piezo Igniter*
- *"Stay Cool" handle with air cooled supports*
- *Cast 18-9 stainless L-bracket mount clamp*
- *Double lined stainless steel inner safety shell*
- *Patented design utilizes convection cooking*

Magma Marine Kettle 2

- 9.5 lbs
- Grilling area: 15" diameter

MGP A10-207 Original size

- 11.8 lbs
- Grilling area: 17" diameter

MGP A10-217 Party size

Parts:

MGP 10-263	Regulator, low output
MGP A10-220	Control valve, low output
MGP 10-657	Burner
MGP 10-960	Piezo ignitor

► NOTE: All Magma Gas Grills use standard disposable 1-lb. propane canisters or adapt to on-board LPG (propane) or CNG (natural gas) systems.

Magma Adventurer Electric Grill

120 Volt, 1500 watt electric grill is perfect for use in marinas that do not permit open flame grilling or on boats that use AC appliances. Thermostatically controlled temperature adjustment. 100% mirror polished 18-9 stainless steel for durable use in harsh environments.

Includes:

- Fold-away legs
- Locking grease tray accessible from either side of the grill
- Locking lid
- Locking removable cord with heat control
- Stay cool lid/carrying handle for easy transport

Uses Magma single mount (SM) onboard mounting options for rectangular grills.

***DO NOT USE LEGS ON BOAT**

MGP A10-703E

Gourmet & Connoisseur Series Grill Mounts

Magma Pow'rGrip/LeveLock Double Locking All-Angle Adjustable Rod Holder Mount HD

Mount adjusts and locks in place at both ends by joining the "LeveLock" adjustable fish rod holder mount, with the "Pow'rGrip" adjustable fish rod holder mount. This allows the "Pow'rGrip" portion of the mount to adjust to any size rod holder and lock in place, while the "LeveLock" portion of the mount, adjusts and locks your Magma rectangular grill: Tournament Series Cleaning Station; or Bait/ Filet Mate™ Single Mount Table to any desired position.

MGP T10-375

Magma LeveLock All-Angle Adjustable Fish Rod Holder Mount HD

Most popular mount is "Hard Anodized" to "aircraft quality" for the greatest resistance to corrosion. Increased range of this already highly adjustable mount; makes it extremely strong, corrosion resistant, and versatile.
NOTE: The "New Style" LeveLock, T10-355 is compatible with both the Bait/ Filet Mate Tables and the new Tournament Series Cleaning Stations

MGP T10-355

Magma Single Horizontal Round Rail Mount

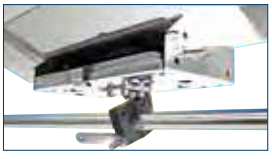

Extremely strong and features 2-way adjustment for perfect horizontal levelling. Made of 18-8 stainless steel and 356 anodized aluminum, it quickly detaches without tools for compact storage leaving no hardware on the rail.

MGP T10-380 Rails to 1"

Magma Socket Type Fish-Rod Holder Mount Standard Duty

Fits Scotty®/Striker GripRod holder sockets. These mounts are designed to fit the most popular plastic rod holder sockets. They quickly disconnect without tools for compact storage. Designed to stow with grill while underway.
*Rod Holder Not Included

MGP T10-365

Magma Single Locking Flush Deck Socket Mount

This attractive mirror polished 18-8 stainless steel flush deck socket set features a push button lock pin and includes a flange gasket with integral flip-up water seal cap. Some fasteners required for installation.

MGP T10-326

Magma Dual Horizontal Round Rail HD Mounts

Incredibly strong and rigid, these rail mounts will not slip on the rail. They have a unique pivoting design which allows them to attach to curved rails or across the corner of a stern rail. Made of 18-8 stainless steel and 356 anodized aluminum, they instantly detach without tools for compact storage leaving no hardware on the rail.

- Fasteners for attaching this mount to Gourmet series grills are included with the grill.

MGP T10-580 7/8" or 1"
MGP T10-585 1-1/8" or 1-1/4"

Magma Dual Extended Horizontal Round Rail Mount

This round rail, quick-disconnect, mounting bracket is made entirely of 18-8 stainless steel and hard and 356 anodized aluminum. Allows mounting of Gourmet Series Grills out over the water. The quick-disconnect system allows quick disassembly leaving no hardware on the rail.

MGP T10-680 1" horizontal round rails
MGP T10-685 1-1/4" horizontal round rails

Magma Dual Extended Horizontal Square Rail Mount

This all 18-8 stainless steel mount extends your grill or filet table 8" in-board or outboard and attaches to square or flat rails up to 4-1/8" (104 mm) high by any depth. Mount can also attach to any flat vertical surface such as bulkheads, gunnels, transoms, or cabin sides. Rod portion of mount quickly disconnects for easy storage

MGP T10-641

Magma Dual Extended Square Rail Mount

This all 18-8 stainless steel mount extends your grill or filet table 8" in-board or outboard and attaches to square or flat rails up to 2-1/4" (57 mm) high by any depth. Mount can also attach to any flat vertical surface such as bulkheads, gunnels, transoms, or cabin sides. Rod portion of mount quickly disconnects for easy storage. Some fasteners required for installation.

MGP T10-640

Magma Dual Locking Flush Deck Socket Mount HD

Two attractive mirror polished 18-8 stainless steel flush deck socket sets features a push button lock pin to allow use while underway. Includes a flange gasket with integral flip-up water seal cap. Some fasteners required for installation.

MGP T10-526

Marine Kettle Series Grill Mounts

Magma Socket Type Rod Holder Mount

These rod holder mounts fit the popular Scotty and many other socket type rod holder mounts. They allow the “Marine Kettle”® to be locked in 12 different positions and quickly disconnects for easy storage without tools. Rod holder sockets not included.

- Fits Scotty rod holder sockets
- 18-8 stainless steel and durable all-weather plastic

MGP A10-165

Magma Round Rail Mount

This round rail, quick-disconnect, all angle mounting bracket is made entirely of 18-8 stainless steel and 356 anodized aluminum. Fits any angle railing and detaches quickly for storage without tools leaving no hardware on the rail.

MGP A10-080 7/8 or 1”
MGP A10-085 1-1/8 or 1-1/4"

Magma Flush Deck Socket Mount



This mount is made of 18-8 stainless steel. A stainless detent pin lets the grill rotate and lock in 8 different positions allowing it to be moved inboard and outboard. Mount includes a raincap. Rod portion of mount quickly disconnects for compact storage. Some fasteners required for installation.

MGP A10-126

Magma Pow'r Grip Fish Rod Holder Mount

Made of 18-8 stainless steel and durable all weather plastic, this vastly improved versatile mount fits most cylindrical type rod holders. It allows grills to mount in any direction from the rod holder. Its unique quick disconnect system allows instant installation or storage after use without tools. Rod holder not included.

MGP A10-175

Magma Square/Flat Rail Mount or Side (Bulkhead) Mount



This all 18-8 stainless steel mount attaches to any vertical flat surface such as bulkheads, hulls, transoms or cabin sides. Also mounts to square or flat rails. Fits HORIZONTAL RAILS up to 2-1/4” (57 mm) high by any depth or VERTICAL RAILS up to 1- 5/8” (41 mm) wide by any depth. Rod portion of mount quickly disconnects for easy storage. Some fasteners required for installation.

MGP A10-240

Magma Mounting Bracket

- Fits Tempress Fish-On Rod Holder Sockets
- 18-8 stainless steel

These rod holder mounts fit the popular Tempress and many other socket type rod holder mounts. They allow the "Marine Kettle" to be locked in 12 different positions and quickly disconnects for easy storage without tools. Rod holder sockets not included.

MGP A10-160

Magma offers the largest selection of mounting options and accessories to customize your grill to your boat.

Magma Gas Grill Serving Shelves with Removable Cutting Board



18-8 Stainless steel detachable serving shelf with U.V. stabilized high-density, FDA approved polyethylene cutting board. Attaches and detaches instantly for quick and easy clean-up or storage. Stores inside of grill when not in use.

MGP A10-901 12″
MGP A10-902 17-1/4”

Magma Third Mate Cockpit Tablet

This versatile table is made of the same material and has all the great features of the "Bait/Filet Mate" with some additional features. The windscreen, made of Pacific Blue Sunbrella boat cover material, is supported by four stainless steel uprights and provides protection against gusty wind and choppy sea conditions. It also features a full length front guard rail and a stainless steel towel and utensil rack. The windscreen detaches quickly for compact storage. "Single-Mount" (SM) mounting hardware is required for complete installation.

- 12" x 24"

MGP T10-306

Magma Bait/Filet Mate Table with Levelock Mount

(Rod holder, filet knives and pliers not included)

- Excellent for fileting fish or serving food and beverages
- Made from FDA approved, high density, polyethylene
- Will not crack, mildew or absorb fish odours
- Features 2 filet knife holders and a receptacle for pliers
- The slot at the back of the tables permits water drainage
- Levelock mount is made of heat treated stainless steel and hard anodized aluminum
- Quick release cam-action design allows all-angle adjustment
- 1-1/2" 18-8 S/S tube fits into most cross-pin type rod holders
- Folds flat for convenient storage
- 12-3/4" D x 20" W

MGP T10-312

Magma Pedestal Mount

Shown with the A10-1218 grill

The pedestal locks into the mounting base and the grill or table locks to the pedestal. The grill or table is instantly removable from the pedestal with a simple push-button release. The pedestal also is instantly removable from the mounting base with a push-bottom release that allows the pedestal to be unthreaded and removed for storage. The low-profile, threaded twist-lock surface mount base measure just 5/8" tall and 7' in diameter with a 5-3/4" bolt pattern. There is no need to cut a hole in your deck. Made of durable anodized Aluminum with a brushed satin finish. Height: 28".

MGP T10-185

Magma Universal Pedestal Adapter

Required when mounting Magma rectangular grills to non Magma pedestal mounts (Todd, Garelick, Springfield)

MGP T10-180

Magma Storage Bag

- Safe, convenient and essential for boats without approved propane or butane gas storage lockers
- Stows 3 disposable butane or propane canisters safely out-over-the-water
- Made of water and fade resistant heavy duty nautical blue polyester boat cover material
- Has heavy nylon adjustable straps with snap connectors for attaching to a horizontal rail or lifeline

MGP A10-210

Magma Grill Covers

- Water and fade resistant Sunbrella boat cover material resists damage from sunlight and mildew
- 5 year warranty covers the fabric becoming unserviceable because of loss of colour or strength from normal exposure conditions, including sunlight, mildew, rot and atmospheric chemicals
- 1 year warranty on all other components

Gourmet & Connoisseur Series

MGP A10-890JB	Trailmate, jet black
MGP A10-890PB	Trailmate, pacific blue
MGP A10-890RB	Trailmate, royal blue
MGP A10-990RB	Newport/Chefmate, royal blue
MGP A10-990JB	Newport/Chefmate, jet black
MGP A10-1290JB	Catalina, jet black
MGP A10-1290RB	Catalina, royal blue
MGP A10-1291JB	Monterey, jet black
MGP A10-1291RB	Monterey, royal blue

Marine Kettle Series

MGP A10-191JB	Original size, jet black
MGP A10-191RB	Original size, royal blue
MGP A10-492JB	Party size, jet black
MGP A10-492RB	Party size, royal blue

Magma Cookware Sets

A 10 piece 18-10 stainless steel cookware set that nests for storage in less than a 1/2 cubic foot of cabinet space. Available in S/S or with DuPont Teflon Select non-stick coatings for worry-free cooking and simple clean-up. The set includes three Sauce Pans (1-1/2 qt., 2 qt., and 3 qt.), a Lid that fits all three saucepans, a 5 qt. Stock Pot, a 9-1/2 inch diameter Sauté Pan, a lid for the Stock Pot and Sauté Pan, 2 removable handles, and a convenient "Bungee" storage cord. All have triple clad bottoms (stainless steel, aluminum, stainless steel) and are milled perfectly flat for even heat distribution on gas, electric or ceramic cooktops. All the cookware is oven safe and dishwasher friendly.

MGP A10-360L	Stainless steel
MGP A10-365L	Teflon

Magma LPG Hose Conversion Kit

Used in conjunction with the MGP A10-224 high output valve, this kit allows you to connect your Magma gas grill into your on-board, preregulated, low pressure LPG (propane) system. Includes all necessary brass fittings, safety shutoff valve and 10 feet (3 m) of preassembled, leak tested hose.

MGP A10-225

Magma Parts & Accessories



"L" Bracket & Clamp

MGP 10-164	Standard
MGP 10-664	Heavy duty

Round, plastic rail adapter

MGP 10-047	7/8" to 1" or 1-1/8" to 1-1/4"

Lever, Nylon Washer & Nut

MGP 10-043	Standard
MGP 10-043HD	Heavy duty

Piezo ignitor

MGP 10-960

Magma Boat Umbrellas

The 7/8” to 1” round rail mount adjusts to fit any angle on your vertical or horizontal railing or stanchion. Made with noncorroding materials, its new windproof design will not allow the canopy to turn inside out or lose it’s shape in gusty wind conditions. A special patented annular baffle is double stitched to the interior and kept rigid by a stabilizing cord. The canopy measures 6 feet across the bow. Fade resistant acrylic coated fabric is stretched over specially designed polymer bow ribs that will not rust or stain the fabric. The 5 foot long shaft is made of flexible double cored fibreglass and has a chrome brass joint for compact storage in its own nylon carrying case. The extra heavy load design of the clamp will not allow the boat umbrella to slip on the rail. Made of 18-8 stainless steel and 356 anodized aluminum, it quickly detaches without tools leaving no hardware on the rail.

MGP B10-401	Multi-Colour
MGP B10-402	Blue

Parts:

MGP 10-481	Clamp assembly

Notes

Seaward Composite Tank Propane Locker

A completely self-contained propane system for installation above the water line. Rotational molded polyethylene construction. Sealed lid with molded inserts holds tank secure even in the roughest sea conditions. Vent port allows overboard venting. Hold down brackets for easy installation. Quick release lid facilitates access to tank, regulator, and leak test gauge. Systems include: fibreglass tank, regulator, leak test gauge, vent kit and solenoid.

- 16-1/2" x 13-1/2" x 18-1/2"
- 10 lb tank

Composite cylinders are manufactured using wound fibreglass and special plastics creating a strong, transparent and light weight container.

- 30% lighter than steel
- Corrosion free
- Protective outer casing
- All cylinders are pre-purged
- Approved by the DOT special permit #13957

SWD 93272

Seaward Compact Propane Lockers

A completely self contained propane system. Rotational molded polyethylene construction. Sealed lid with molded inserts holds tank secure even in the roughest sea conditions. Vent port allows overboard venting. Hold down brackets for easy installation. Quick release lid top facilitates access to tank, regulator, and leak test gauge. System includes: one gallon tank, regulator, leak test gauge, vent kit and solenoid.

SWD 93268
5 lb locker kit with steel tank & solenoid

- W: 16" x D: 14-1/4" x H: 12-1/4"

SWD 93271
10 lb. locker kit with aluminum tank & solenoid

- W; 16-1/2" x D: 13-1/2" x H: 18"

Parts:

SWD 73509 Propane regulator only

Seaward Propane Tanks

Composite cylinders are manufactured using wound fibreglass and special plastics creating a strong, transparent and light weight container.

- 30% lighter than steel
- Corrosion free
- Protective outer casing
- Stackable
- Bar coded and serial numbered
- All cylinders are pre-purged

Approved by the DOT special permit #13957

Part #	Net Propane	Dia	O.L.	Tank wt.
SWD LC10-BLUE	10 lbs	9.7"	17.3"	9.6 lbs
SWD LC20-BLUE	19 lbs	12.4"	18"	12.6 lbs

* Re-certification date for all composite cylinders is 15 years

Propane Tanks

Type I, DOT approved steel propane cylinders for camping, cooking, gas grills, recreation vehicles, boat propane lockers, etc.

Part #	Height	Diameter	Capacity
PRP PTS5-1OPD	10-7/8"	9-1/4"	4-1/4 lbs
PRP PTS10-1OPD	16-3/4"	9-1/4"	11 lbs

1OPD = Over fill protection type valve

Seaward Welded Aluminum Propane Tanks

All tanks DOT approved.

- Brass valve
- Will never rust out

SWD 93131-M

- 10# Vertical. 2.5 gallons
- 10-3/8" W x 17" H

SWD 93136-M

- 20# Vertical. 5 gallons
- 12-3/8" W x 21" H

SWD 93137-M

- 10# Horizontal. 2.5 gallons
- 17" W x 11" H

SWD 93138-M

- 20# Horizontal. 5 gallons
- 21" W x 13" H"

Re-certification dates for all aluminum tanks is 12 years

Fairview Hose Assemblies



Used to connect the stove to the regulator.
FS 3/8" x FS 3/8" fittings with rubber hose.

Part #	Hose I.D.	Length
PRP I4C120FS6FS6	1/4"	120"
PRP I6C60FS6FS6	5/16"	60"
PRP I6C60FS6FS6	3/8"	60"
PRP I6C120FS6FS6	3/8"	120"
PRP I6C180FS6FS6	3/8"	180"
PRP I6C240FS6FS6	3/8"	240"
PRP I6C258FS6FS6	3/8"	258"
PRP I6C300FS6FS6	3/8"	300"

Fairview Hose Assemblies

Used to connect the regulator to the tank.
MP 1/4" x Standard POL 1/4" fittings with rubber hose.

PRP I4C18MP4POL 18"
PRP I4C24MP4POL 24"
PRP OR-POL Spare O-ring

Fairview Hose Assemblies

MI 1/4" x Standard POL 1/4" fittings with rubber hose.

PRP I4C18MI4POL 18"
PRP I4C24MI4POL 24"

Fairview Hose Assemblies

MP 1/4" x QCC 1-5/16" x I.D. 1/4" fittings with rubber hose.

PRP I4C18MP4QCC 18"

Fairview Hose Assemblies

BBQ hose to Add-A-Flow tee adapter #PRP 2012.
FC 1"-20 x MC 1"-20 Hose I.D. 1/4".

Part #	Length	Hose
PRP I4TC72FCMC	72"	Rubber
PRP I4TC144FCMC	144"	Thermoplastic

Fairview Hose Assemblies

- BBQ hose direct to tank. MC 1"-20 x POL H/W x I.D. 1/4"Thermoplastic hose

PRP I4TC72MCPOLHW 72"
PRP I4TC144MCPOL 144"

Fairview Propane Pressure Gauges

All pressure gauges have 1/4" MPT connection.

Part #	Case Material	Max. Pressure	Case Size	Mount
PRP PG-200CD2	Steel	200 P.S.I.	2" dia.	Back
PRP PG-300SD2	Steel	300 P.S.I.	2" dia.	Bottom

Fairview Two Stage Regulator

Die cast zinc, high quality, two stage (high- low) pressure regulator with molded rubber diaphragms and 160,000 BTU capacity.

- Mounting holes on 3-1/2" centre
- Inlet 1/4" FPT
- Outlet 3/8" FPT
- Ideal for larger applications
- Weight 1 lb.
- 5-3/4" L x 3-1/8" W x 2-5/8" H

PRP GR-9950

Fairview Single Stage Regulator

Die cast zinc. Molded rubber diaphragms with 175,000 BTU capacity.

- Ideal for portable devices
- Mounting holes on 3 1/2" centre
- Inlet 1/4" FPT
- Outlet 3/8" FPT

PRP GR-800

Fairview Auto Change-Over Regulator

The change-over feature of this regulator gives the user the benefit of a continuous gas supply by automatically changing to a reserve cylinder when the service cylinder is empty. It features a green indicator dome which changes to bright orange when the service cylinder needs to be refilled. A gentle push on the sliding face plate will change from the reserve cylinder back to the service cylinder.

PRP GR-9984

Fairview Add-A-Flow Tee

This adaptor allows the use of the existing regulator and supply line while providing an outlet to supply fuel to a BBQ that has its own regulator.

PRP 2012

Fairview Reserve Cylinder Adapter

- Brass construction
- Cylinder thread: 1"-20
- P.O.L. Female

PRP 2097

Fairview Tailpiece with O-Ring

- 1/4" MPT

PRP 2003-T

PRP HW Hand wheel for tailpiece

Fairview Manifold for Dual Tanks

- Inlet -1/4" inverted flare
- Outlet -1/4" Male pipe

PRP 2000

Fairview P.O.L. To QCC Adapter

- Brass construction
- QCC: Female
- P.O.L. Male

PRP 2087

Fairview Propane Thread Sealing Tape

Use for sealing threads on fittings used in propane installations.

PRP 121M8-UL 1/2" x 236"

► *Also See:* *Telfon Tape pg 369*

Fairview Regulator Accessories

Part #	Description	Use with Regulator No.
PRP GR-240-32	Mounting bracket	GR-254-00 & GR-290-00

Dri-Z-Air Dehumidifier

Removes excess moisture. Helps prevent condensation on windows and ceilings. Units come complete with one 368 gram (13 oz.) package of crystals.

DRI DZA-UNIT

Parts:

DRI DZA-REFILL	13 oz refill
DRI DZA-60	60 oz refill
DRI DZA-T	Spill tray

Star brite No Damp Ultra Dome

NEW

A super dry, concentrated pellet formula absorbs more moisture per ounce than flake formulas. The actual amount absorbed will vary depending on temperature and relative humidity. The unique design of the dome allows maximum airflow over and through the pellets for peak efficiency. This design, which locates the pellets above the trapped moisture, allows collection of up to 50% more humidity from the air than traditional dehumidifiers. The super dry pellets remain effective much longer than other units. The over-sized container safely holds trapped liquid for disposal. The mesh dome also prevents articles of clothing or other items from accidentally coming in contact with the pellets or liquid.

STA 85460 24 oz

Star brite MDG Mildew Odour Control Bags

Each pack contains: 2 - 4 oz. bags, 2 - decor holders and 2 - hang ties. Dries air to level where mildew odours and associated musty odours will not form. Nontoxic, formaldehyde free. Each bag protects 400 cu. ft.

- Fresh scent
- Comes with display carton

STA 89900 2/pkg

Star brite No Damp Hanging Moisture Absorber Bag

NEW

- Eliminates mildew odours and other musty odours
- Helps prevent damage & stains caused by excess airborne moisture
- For use in any inclosed area

STA 85470 14 oz

Davis Instruments Air-Dryr

Safe, inexpensive and effective way to fight mould and mildew 24 hours a day. Cool, damp air is drawn through the bottom base panel, then heated and released through the top perforated surface. This unit has no fans, thermostats, switches, or moving parts, nothing to fail or to cause a spark. Safe for use even in the engine compartment of a boat. 120V, UL listed.

Air-Dryr 1000 covers up to 1000 cubic feet of living space. Draws only 1.1 amps, 130 watts.

- 13.5" Diameter x 4.25" H

DIN 1458 Air-Dryer 1000

Air-Dryr 500 covers up to 500 cubic feet of living space. Draws only 0.6 amps, 70 watts.

- 14 x 5 x 4.5"

DIN 1459 Air-Dryer 500

Caframo Stor-Dry

- Internal blower circulates air for enhanced ventilation
- Continuous trouble free operation
- Anodized aluminum
- Low current draw, inexpensive to operate
- Safe and effective
- Sparkless for RV and boat applications
- 120 Volt
- 2 year warranty

CAF 9406

Caframo Compact Heater

- 120 volts
- Heat output:
  Hi - 5083 BTU/HR
  Med - 3389 BTU/HR
  Low - 1694 BTU/HR
- "Anti-Freeze" setting
- Fan only option (18 watts)
- 5 year limited warranty
- 11-1/4" L x 8" W x 5" H

CAF 9206CABBX

Delta T Systems Dehumidifiers

Designed for occasional or continuous use, water simply drains through a hose into a sink, grey-water tank or overboard. It can remove a maximum of 2.6 gallons per week at 86° F at 80% humidity and .4 gallons in typical winter conditions. It is one-third the size of traditional compressor/condenser type units and uses a fraction of the power, employing state-of-the-art Peltech GEOtronic Technology, with a small, solid-state heat pump

- Marine-grade materials and components
- 8-1/4" W x 13-1/3" H x 5-1/3" D
- 8.6 pounds
- Use as a portable device or install permanently
- Consuming merely 66 watts
- Ignition protected

DTS 801-DRYBOAT-12 12V
DTS 801-DRYBOAT-24 24V

Xtreme Bilge Heaters

True forced air heating circulates air more effectively, heats more evenly for more accurate climate control. Other "radiator" style heaters rely on convection, leaving cold areas in the engine compartment. Forced air assures a more accurate and consistent temperature in the entire engine compartment.

- CFM: 32
- 120V

Automatic thermostat turns heater on at 40°F and off at 55°F +/-3° the tightest tolerance on any bilge heater on the market. Other heaters have a 5° tolerance in their thermostats, which can result in an inaccurate reading and inconsistent temperature control.

Failsafe design cannot overheat. The temperature-limiting characteristic heating technology is dynamic and self regulating. Other heaters have no way of limiting their temperature should something go wrong.

Certified Independently Tested to Meet:

- U.S. Coast Guard Ignition Protection Standards
- Transport Canada Ignition Protection Standards
- ABYC E-11
- SEA J1171
- ISO 8846
- MIL-SPEC 810E

Part #	Watts	BTU's	W x L x D	Amp Draw
XTR XHEAT	300W	1023-1790	6" x 4" x 5-1/8"	3
XTR XXHEAT	450W	1535-2130	8" x 4" x 5-1/8"	4
XTR XXXHEAT	600W	2050-2725	8" x 4" x 5-1/8"	6

Heater Craft 200 Series Hydronic Heaters

Acu-Heat's technology is similar to a car heater, using the hot water generated by the engine's cooling system. Each series is compatible with a freshwater cooled I/O or inboard engine. Designed to withstand the harsh marine environment.

Perfect for the family runabout. 28,000 BTU/hr's of glorious heat is easily vented to bow or rear seating areas while second vent can be ducted to the helm. Kit features: three-speed fan. Heater housing is constructed of heavy duty marine grade aluminum and powder coated to prevent corrosion.

- Amperage: Low 4.4, Med 5.8, High 8.5
- Max. est. BTU/h: 28,000
- Air flow: Low 230 cfm, Med 228 cfm, High 263 cfm.
- Hose barb: 5/8" or 3/4" (special)

Kit includes
1-Heater unit with wire harness.
2-Universal mounting brackets with screws
3-14" Heavy duty wire ties
1-Switch plate and indicator assembly
2-6' lengths of 14 gauge wire.
2-6' lengths of 3" vent hose
2-directional Euro vents Dim: 9.4" W x 6.4" H x 9.35" D

HCM 201-H-B 12V, Includes two eurovents
HCM 201-H-B 24V 24V, Includes two eurovents
HCM 203-H-B 12V, Includes one eurovent and one hot tube

Spare Parts:
HCM H-202 Heater core 95 & up
HCM H-205 Heater fan wheel

Heater Craft 300 Series Hydronic Heaters

High output with lots of flexibility. 40,000 BTU/hr of heat is ducted to three separate areas of the boat. Features: three-speed fan. Heater housing is constructed of heavy-duty marine grade aluminum and powder coated to prevent corrosion.

- Amperage: Low 4.7, Med 6.3, High 9.2
- Max. est. BTU/h: 40,000
- Air flow: Low 188 cfm, Med 250 cfm, High 266 cfm.
- Hose barb: 5/8”

Kit includes:
1-Heater unit with wire harness.
2-Universal mounting brackets with screws
14” Heavy-duty wire ties
1-Switch plate and indicator assembly
2-6’ lengths of 14 gauge wire.
2-6’ lengths of 3” vent hose

- Dimensions: 15.95" W x 6.55" H x 9.4" D

HCM 301-H-B 12V, includes three eurovents
HCM 303-H-B 12V, includes two eurovents and one hot tube
HCM 317-H-4B 12V, includes four eurovents

Spare Parts:
HCM H-301 Heater core
HCM H-304 3-H, 4-H fan motor assembly

Heater Craft 700 Series Hydronic Heater

A low amp draw, heat delivery solution for larger boats or yachts that utilize a fuel fired boiler system. This 9790 BTU/h heater delivers quiet, reliable heat with an amperage draw of only 0.95. Unit features: single speed fan. Inside: long lasting tube and fin heater core with 3/4” hose barb is neatly kept within a heavy-duty marine grade aluminum housing that is powder coated to prevent corrosion. Heat is ducted through two 3” outlets to single directional euro vent.

- Amperage: 0.95
- Max. est. BTU/h: 9790
- Air flow: 140 cfm
- Hose barb: 3/4”

Kit includes:
1-Heater unit with wire harness.
2-Universal mounting brackets with screws
4-14” Heavy-duty wire ties
2-6’ lengths of 3” vent hose
2-directional eurovents

HCM 702-H2-B

Heater Craft Mercury Optimax SportJet 200 Heater Plumbing Kit

Our innovative design extracts heat energy from two cycle SportJet power heads, then directs it to where it is needed the most–to the passengers. This plumbing kit is used in conjunction with any of Heater Crafts’ ducted or grilled 3/4” hose barb hydronic heater assemblies. This flexibility gives the boat owner a choice of 28,000 BTU/h or 40,000 BTU/h heat output and a multitude of venting options.

- Two year warranty

Kit includes the following pieces:

- 50’-3/4” 150 psi. heater hose
- 5’- 5/8” 150 psi. heater hose
- 1-Pressure relief block-off plate with 5/8” hose barb
- 1-Thermostat and housing
- 1- 5/8” barbed thru-hull fitting
- 2- #8 SS hose clamps
- 6- #10 SS hose clamps
- 8- 14” UV wire ties
- 1-Installation guide

HCM H-401SJ

Heater Craft Hot Tube Extendable Vent

Hot Tube extendable vent puts heat where you want it. Pull out Hot Tube vent and place under jacket or towel filling air space with luxurious warmth. New updated design allows regulation of air flow from wide open to completely off. When not extended Hot Tube acts as a traditional adjustable heating vent. Hot Tube accepts stylish accent rings sold separately in choice of white, chrome or brushed aluminum. Comes with a length of heater tube for installation.

HCM H-521-B

Heater Craft Accessories

HCM E-112	4 position rotary switch for 200, 300, 400 & 500H units
HCM E-113-B	4 position rotary switch mounting plate for E-112
HCM H-207	3-Speed motor fan assembly
HCM H-401	Hose & fitting kit, 25' of 5/8" hose with clamps and all the pipe fittings required to connect to the engine
HCM H-501-3	3" I.D. vent hose (sold by the foot)
HCM H-503	3" "Y" fitting
HCM H-504-B	Eurovent - Black
HCM H-504-W	Eurovent - White
HCM H-505	Surface mount for eurovent
HCM H-506-B	Surface mount 4" rotaire vent-Black
HCM H-510	Surface mount for hot tube
HCM H-512-B	Hot tube only w/black grill

Dickinson Radex Hot Water Forced Air Heaters

Utilizes waste water heat produced by a water cooled engine or any circulating hot water source to generate forced air heat. High quality stainless steel construction. Self contained units include either single or double high efficiency 12V fans and illuminated rocker switches. Flush mount frame or side mount brackets sold separately. Rear exit fitting: 3/4" O.D. copper tubing.

Part #	BTU Hour	Air Flow (CFM)	Fans	Amps	Dimensions W" x H" x D"
DIC 00-RAD-1	12,000	100	one, 12V	0.74	10-3/8 x 7 x 5
DIC 00-RAD-2	24,000	200	two, 12V	1.48	16-7/8 x 5 x 5

Parts:

DIC 22-001	Radex 1 & 2 side mount kit
DIC 22-002	Radex 1 frame mount kit
DIC 22-003	Radex 2 frame mount kit
DIC 01-041	12V fan only

Red Dot Auxiliary Heaters

Versatile and maintenance-free. Round tube and fin design allows heater mounting in any position, using our multi-position leg brackets or flush mount frame. The compact size, simple plumbing and high output are ideal in any application. Spot-welded, steel plate construction finished in a decorative, chip resistant black paint. Use with fresh water cooling systems only. Comes complete for floor or bulkhead mounting. Two speed fan motor. Rear exit fittings: 5/8" hose barb.

Part #	BTU/ hour	Air Flow (CFM)	Motor (s)	Current Draw (Amps)	Dimensions W" x H" x D"
RED R-254-0	16000	150	One, 12V	3.3	9-1/4 x 6-3/4 x 3-3/4
RED R-254-0-24	16000	150	One, 24V	1.7	9-1/4 x 6-3/4 x 3-3/4
RED R-255-0	30000	280	Two, 12V	6.6	16 x 6-3/4 x 3-3/4
RED R-255-0-24	30000	280	Two, 24V	3.3	16 x 6-3/4 x 3-3/4

Parts:

RED RD-5-10491-24P	24V Motor only F/(254/255OP)
RED RD-5-10491-OP	12V Motor only F/(254/255OP)
RED RD 5-8641-1P	12" Fan upgrade kit 24V
RED RD 3133-9P	Fan only (254/255)
RED RD-1-0355-OP	Heater core (254/256)

Red Dot Heater Defroster

A versatile and high-output heater/defroster runs off of a fresh water cooling system. The blower housing can be rotated 360 degrees in four separate positions so heat and defrost outlets are where you need them. The compact design often allows under-dash or other compartment installation. Along with a two-speed motor, a diversion door can be manually or cable-operated to control defrost and heat output. Finished in chip resistant black paint.

- BTU's hour: 20000 @ 100ºF air temperature rise
- Airflow: 185 CFM
- Dry weight: 15.7 lbs.
- Single motor: 12V DC, 2 speed
- Current draw: 11 amps
- Fittings: 5/8" hose barb

RED R-4013HP Defroster

Parts:

RED RD-3196-5P 3-1/2" Defroster adapter
RED RD-4156-108P 3-1/2" x 9' Defroster hose
RED RD 3106-13P Motor only

DIMENSIONS

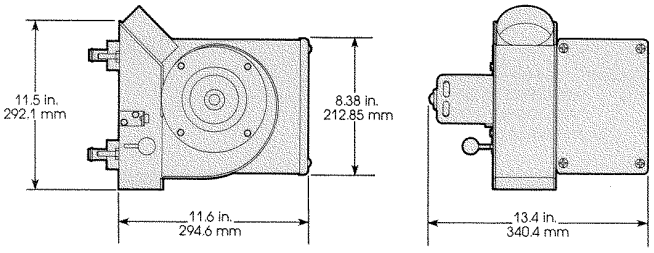

Dickinson Lofoten Heaters

Rectangular, floor mounted heater for boats 36ft-40ft. Similar to the Antarctic in performance but with a larger top area and a cast-iron lid providing a top cooking surface.

W x D x H	10.75" x 17" x 18"
Flue Size	4" / 10.16 cm
Weight	25 lbs
Material	Stainless steel
Fuel	Diesel (kerosene optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" / 15.2 cm Airflow
Draft Assist Fan	Standard
Valve Code	2 Diesel/1 Kerosene

DIC 00-LOF Diesel oil heater/12V fan
DIC 00-LOF-1* Same with 1/turn coil
DIC 00-LOF-KER* Kerosene oil/12V fan

* Request Items

Dickinson Antarctic Heaters

Large floor mounted diesel heater for boats 36ft-40ft. Size of heater produces greater heat output than the smaller heaters although fuel consumption is the same. Dry comfortable heat and large flame viewing window. Manufactured in stainless steel. For larger cabins and live a boards.

W x D x H	13" x 13" x 24.5"
Flue Size	3" / 7.6 cm
Material	Stainless steel body cast-iron top
Fuel	Diesel (stove oil or kerosene)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" / 15.2 cm 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Hot Water Coil	Optional (1 or 2 turn)
Weight	29 lbs

DIC 00-ANT* Diesel oil heater with a 12 Volt Fan
DIC 00-ANT-12-1* Heater with 12 Volt Fan & 1 Turn Coil

* Request Items

Dickinson Alaska Heater

Small, compact, floor , mounted diesel heater for boats 30ft-36ft Attractive, economical diesel burning fireplace producing comfortable dry heat.

W x D x H	8.75" x 10" x 21"
Flue Size	3" / 7.6 cm
Material	Stainless steel body and top
Heat Output	Low 6500 BTU High 16250 BTU
Burner	6" / 15.2 cm 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Hot Water Coil	Optional (1turn)
Weight	20.5 lbs

* Request Items

DIC 00-ALA* Diesel oil heater with 12 volt fan

► *Also See* *Diesel Stoves pg 333-335*

Dickinson Newport Diesel Fireplace

Bulkhead mounted diesel fireplace. Ideal for boats 30/36 ft. Should be mounted as low as possible on the bulkhead to provide excellent, dry, comfortable heat convection, to provide good natural draft and to reduce through deck stack temperatures. Manufactured in stainless steel.

W x D x H	8.5" x 10.5" x 19.75"
Weight	22 lbs
Flue Size	3" / 7.6 cm
Material	Stainless steel body & top
Fuel	Diesel (stove oil or kerosene optional)
Heat Output	Low 6500 BTU, High 16250 BTU
Burner	6" / 15.2 cm 'Airflow'
Operation	Natural draft
Draft Assist Fan	Standard
Valve code	3 (D, S or K)

DIC 00-NEW Diesel oil heater/12 Volt Fan
DIC 00-NEW-24V* Heater/24 Volt Fan
DIC 00-NEW-1TC* Heater with a one turn coil

* Request Items

Dickinson Newport Solid Fuel Heater

Small heater designed for casual use. Burns wood, charcoal briquettes and coal. Removable ash drawer and damper control. Mounting brackets included.

W x D x H	7.88" x 10" x 14.75"
Flue Size	3" / 7.6 cm
Weight	12 lbs
Material	Stainless steel body & top
Fuel	Charcoal briquettes, wood fire logs, solid fuels.

DIC 00-NEWSF

Dickinson Heatex

The Heatex by Dickinson utilizes the heat produced by your stove's exhaust. Obtain extra warmth where you need it - in the cabin, the galley or the sleeping quarters. Simply install the Heatex in place of your stovepipe and run the hoses to the area to be heated. All stainless steel construction. Complete with 100 cfm 12V fan.

DIC 00-HEA3* Use with 3" flue
DIC 00-HEA4* Use with 4" flue
DIC 00-HEA5* Use with 5" flue

*Request items

Dickinson Newport Propane Fireplaces

- Easy to install-easy to use
- Unaffected by wind
- Large glass viewing area
- Safe direct venting
- Safe manual ignition
- Stainless steel back panel
- 28" flexible vent pipe, deck fitting, blower fan & flue cap **included**

*Low pressure regulator required (not included)

	00-NEW-P9000	00-NEW-P12000
W x D x H	8.5" x 5.5" x 14"	10" x 7.25" x 16"
Weight	15 lbs / 6.82 kg	22 lbs / 10 kg
Flue Size	2.5" OD double wall / 28" long	
Material	Stainless steel body	
Voltage	12 Volt / 0.17 amps	
Heat Output	Low 5500 BTU	Low 7000 BTU
	High 7500 BTU	High 9700 BTU

DIC 00-NEW-P9000
DIC 00-NEW-P12000

Parts:

DIC 19-000 28" Double walled flexible S/S pipe extension w/ connector sleeves
DIC 19-150 Low pressure regulator with mounting bracket for 1 lb disposable propane bottles

Seaward Water Heaters

An economical, combination electric/engine heat exchanger, water heater. Heats water quickly from the 120/240 volt-1500 watt, 13" electric element while on A.C. power or from the heat exchanger from the engine's cooling system while under way. Hold down brackets are welded directly to the aluminum tanks. Comes complete with a temperature pressure relief valve, temperature & pressure drain tube and are ignition protected. Seaward tanks carry an extended 1 year limited warranty on all parts and on tanks against leaks due to rust and corrosion.

- Domestic water ports: 1/2" IPT
- Heat exchanger: 5/8" hose barbs
- Re-settable 190° high limit switch
- Exterior choices are marine galvanized steel, powder coated aluminum or stainless steel
- UL & CE approved
- Rear exchangers have the 5/8" engine fittings on the back side
- Front exchangers have all connections on front side and are identified by an F in the beginning of the part number.

Part #	Heat Exchanger	Capacity	W x D x H	Material
SWD S300W	Side	3 Gallons	13" x 9" x 13"	Polycoated aluminum
SWD S600	Rear	6 Gallons	13" x 19" x 13"	Galvanized steel
SWD S600W	Rear	6 Gallons	13" x 19" x 13"	Powder coated white
SWD F600	Front	6 Gallons	13" x 19" x 13"	Galvanized steel
SWD F600W	Front	6 Gallons	13" x 19" x 13"	Powder coated white
SWD F700	Front	6 Gallons	13" x 19" x 13"	Stainless steel
SWD S700	Rear	6 Gallons	13" x 19" x 13"	Stainless steel
SWD S1100	Rear	11 Gallons	16" x 22" x 16"	Galvanized steel
SWD F1100	Front	11 Gallons	16" x 22" x 16"	Galvanized steel
SWD S1200	Rear	11 Gallons	16" x 22" x 16"	Stainless steel
SWD F1200	Front	11 Gallons	16" x 22" x 16"	Stainless steel
SWD S1900	Front	18 Gallons	20-1/4" x 20-1/4 x 27"	Stainless steel
SWD HF-2200	Front	20 Gallons	16" x 32" x 16"	Stainless steel

Spare Parts:

SWD 74031	120V heating element
SWD 73127	Pressure relief valve
SWD 73129	Thermostat
SWD 74563	High limit switch 120 volts
SWD 74556	Magnesium 3/4" anode

Torrid Water Heaters

These glass-lined electric water heaters have a super fast recovery from either dock side or AC generator power supply. Exclusive heat exchanger design provides ample hot water from engine cooling system while under way. Adjustable electric thermostat: 120°-180°F. The unique Incoloy element is designed to operate without damage if the tank is dry. Units are covered by a 5 year limited warranty against failure of the storage tank, any electrical component or mechanical part. Model No. denotes capacity in US Gallons. Heat Exchanger threads are 3/4".

MH Series - Horizontal

Part #	A	B	C	D	E	F	G	H
TOR MH-6	21"	14-1/2"	16"	14-1/8"	11-1/8"	9-1/2"	5"	5"
TOR MH-10	29"	14-1/2"	24"	14-1/8"	11-1/8"	9-1/2"	5"	5"





MV Series - Vertical							
Part #	*A*	*B*	*C*	*D*	*E*	*F*	*Volts*
TOR MV-6	14"	17-1/4"	12-5/8	2-1/2"	6-3/4"	10-5/8"	120V
TOR MV-10	16"	17-3/4"	12-5/8"	2-1/2"	6-3/4"	10-5/8"	120V
TOR MV-17	16"	28-1/4"	23-1/8"	2-1/2"	6-3/4"	10-5/8"	120V
TOR MV-20	20"	22-1/4"	16-1/2"	2-1/2"	6-3/4"	10-5/8"	120V
TOR MV-20-240V*	20"	22-1/4"	16-1/2"	2-1/2"	6-3/4"	10-5/8"	240V-3000W
TOR MV-30	20"	30-1/4"	24"	2-1/2"	6-3/4"	10-5/8"	120V
TOR MV-30 60HZ*	20"	30-1/4"	24"	2-1/2"	6-3/4"	10-5/8"	240V-60HZ

*Request Items

Parts:

TOR TPV	Relief valve
TOR AND12	Anode for MV6/10
TOR AND18	Anode for MV20 & MH10
TOR AND24	Anode for MV17/30 & MH17

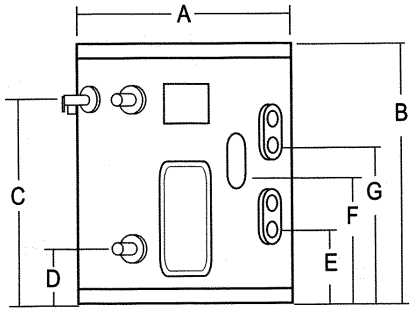

**Torrid heaters are also available with a stainless steel exterior and dual heat exchangers. Please call for more information.